


Pollution Monitors With Analog Data Capturing

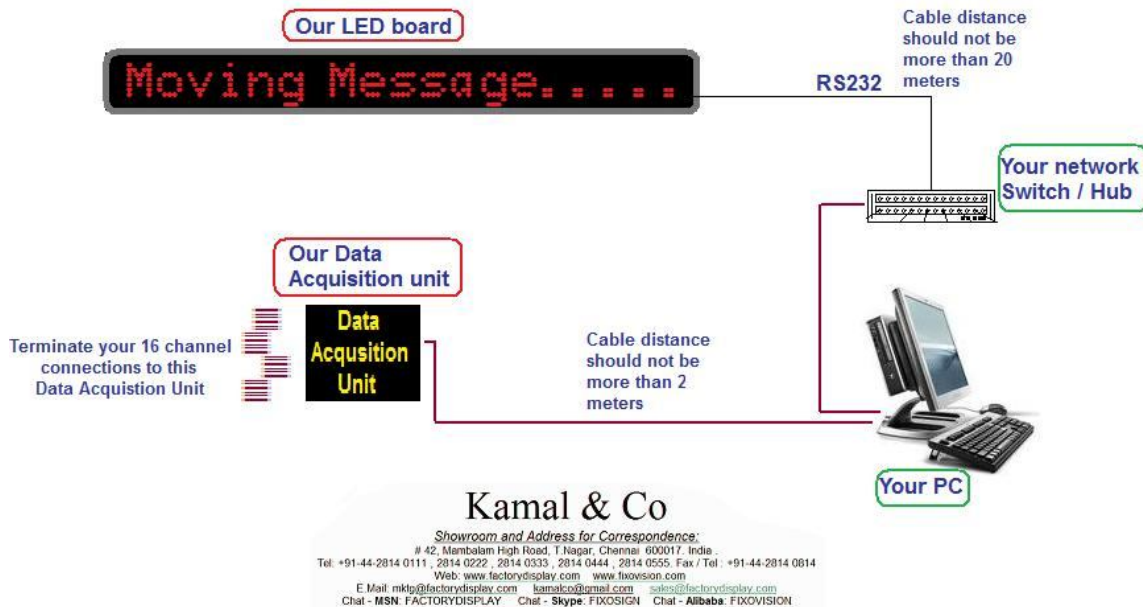

1. 16 CHANNEL DATA LOGGER WITH REMOTE MOVING SINGLE LINE BILINGUAL DISPLAY AS PER THE FOLLOWING SPECIFICATION: MULTICHANNEL DATA LOGGER:

1. NO. OF INPUTS: 16
2. TYPE OF INPUTS: 4 TO 20 MA DC
3. DISPLAY: 6 DIGIT LED
4. DIGITAL OUTPUT I : TO REMOTE MOVING DISPLAY, RS 485, 9600 BAUD RATE, NO PARITY, 8 BIT, 1 STOP BIT
5. DIGITAL OUTPUT II: RS 232 TO PC WHERE DATA ACQUISITION TO BE LOADED
6. POWER SUPPLY: 230 V AC
7. TYPE OF MOUNTING: TABLE TOP

2. REMOTE MOVING DISPLAY:

1. NO. OF LINES OF DISPLAY: ONE
2. SIZE OF DISPLAY: 5.5 INCHES
3. MATRIX SIZE: 16 X 192 PER LINE
4. COLOUR OF LED: RED FOCUS LED
5. LANGUAGE DISPLAYED: ENGLISH & TAMIL
6. NO. OF PAGES DISPLAYED: MAX 16 PAGES
7. TEXT TO BE SENT FROM SCANNER ON RS 485 COMMUNICATION
8. MEMORY PROVIDED TO STORE DATA
9. MS POWDER COATED CABINET WITH HOOD SHALL BE PROVIDED

Kamal & Co, 42, Mambalam High Road, T.Nagar, Chennai 600017. +91-44-28140814, 28140111, 28140222, 28140333, 28140444, 28140555
www.factorydisplay.com www.fixovision.com email: kamalco@eth.net

10. APPROXIMATE SIZE OF BOARD; 72(W) X 12 (H) X 2 (D)
 11. REAL TIME CLOCK
 12. DISPLAY TIME :5 SEC FOR TAMIL&ENGLISH
 13. POWER SUPPLY: 230 V AC
3. **PARAMETER DISPLAY:**
1. 16 CHANNEL WITH UNIT AND DESIGN VALUE ALONGWITH THE REAL TIME DISPLAY
 2. PROGRAMMABLE WELCOME MESSAGE IN TAMIL & ENGLISH
 3. ALL THE 16 PARAMETER DISPLAY SHALL BE IN ENGLISH & TAMIL ALTERNATIVELY PROGRAMMABLE DISPLAY SPEED